

havasis

ÇÖZÜMÜN
İLK ADI



Kurumsal & Ürünler

havasis.com.tr



Sipariş & Danışma Hattı

0549 449 3535

Teklif & Ürün Bilgi

info@havasis.com.tr

Kalibrasyon & Bakım Onarım Merkezi

servisdestek@kalibo.com.tr



vacuuMac
Katalog

ÜRÜN
KATALOGU

ATEX AND ACD VACUUM CLEANERS

HSPLUSDEX1-2D

ATEX INDUSTRIAL VACUUM FOR HEAVY DUTY USE



POWER
4 kW - 5,5 HP



APPLICATION
Combustible dusts




CAPACITY
65 Lt

FEATURES

- Certified for intensive work in Atex zones 21 or 22
- High filtration efficiency, with complete grounding of the unit
- Category 1D certified internal protection for maximum safety
- Powerful side channel blower certified Atex in category 2D

HIGHLIGHTS

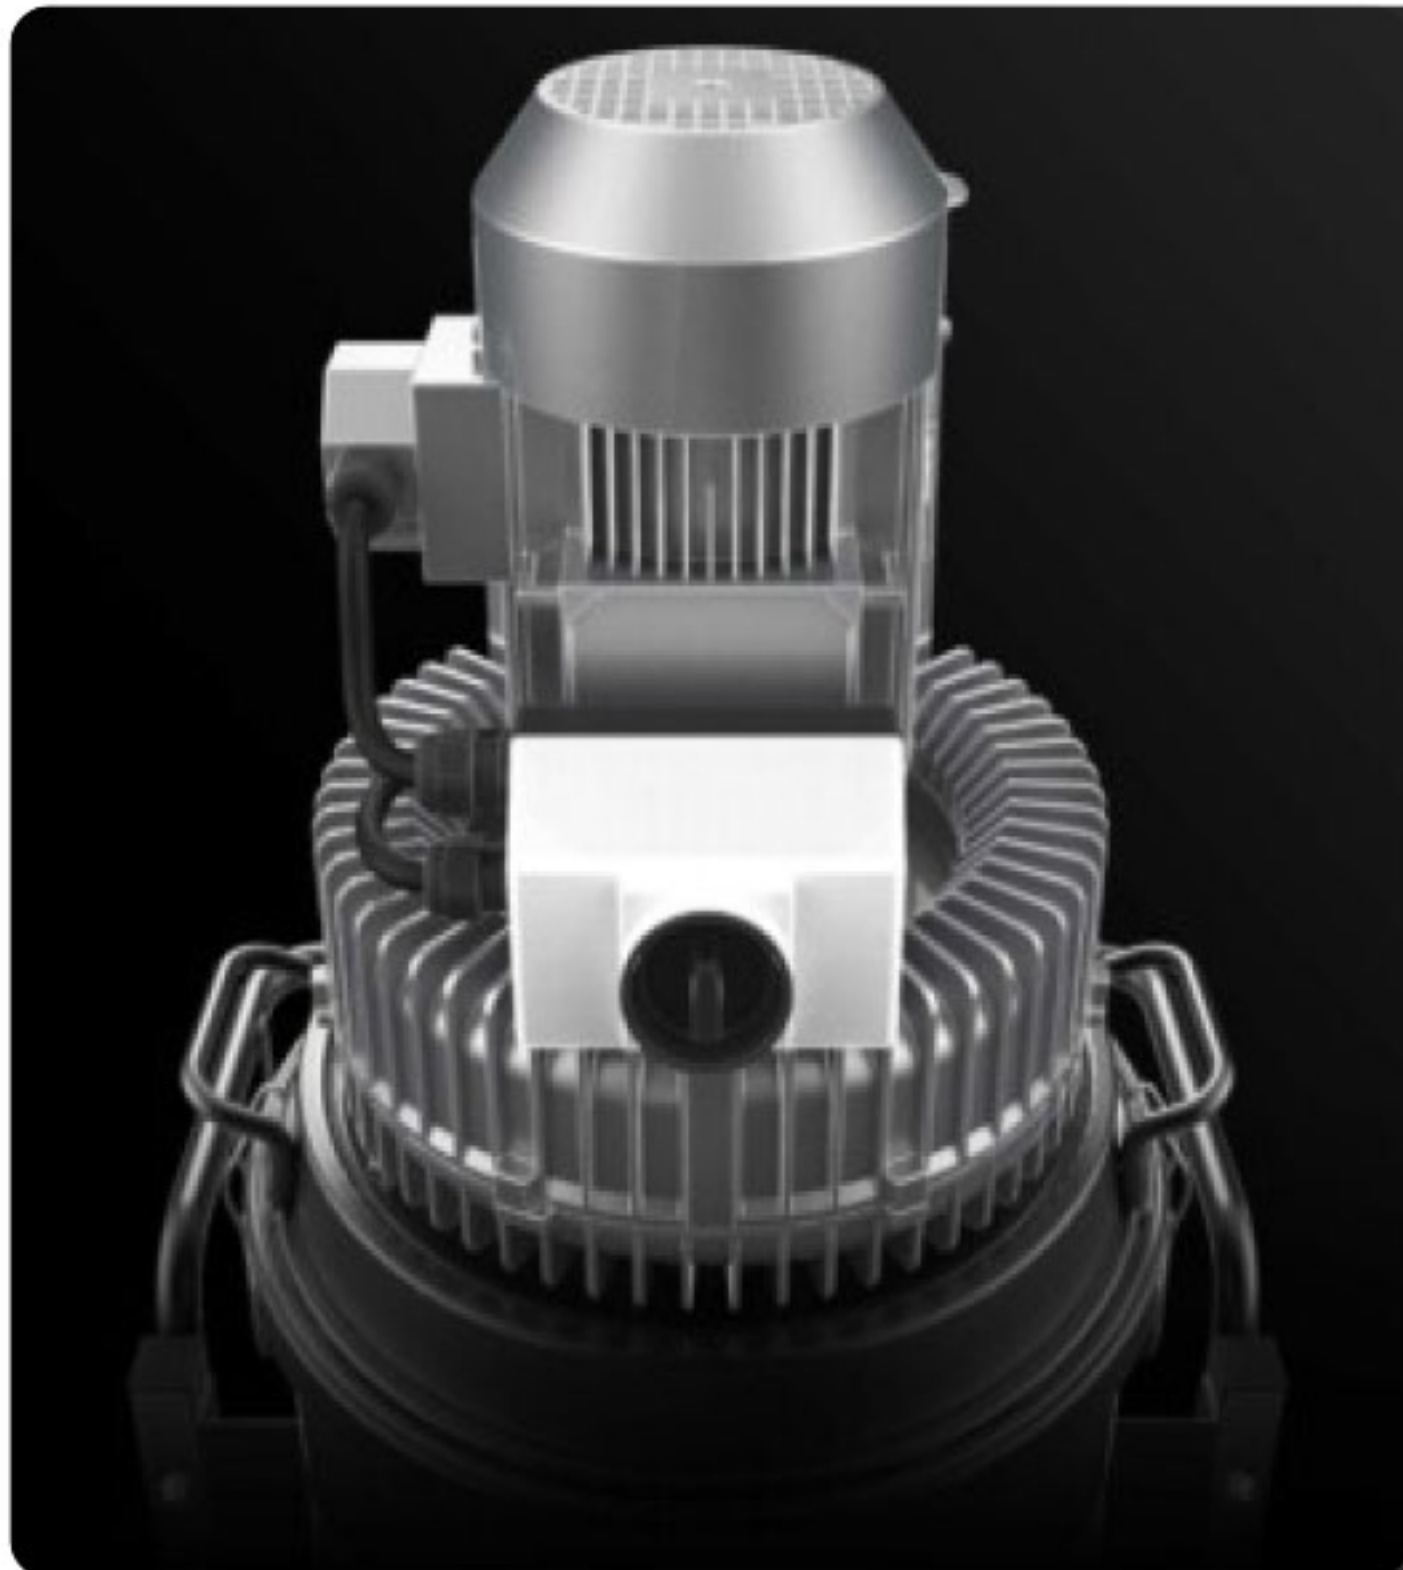


SUCTION UNIT

The suction unit is a manufacturer-certified Atex side channel blower with direct coupling between motor and impeller. The Side Channel Blower is equipped with a safety valve that ensures continuous work, without any maintenance.



INTERNAL CERTIFICATION CAT 1D - ZONE 20

Thanks to its 1D - Zone 20 certified chamber, the vacuum cleaner guarantees maximum safety and compliance when vacuuming combustible or conductive dusts (Group IIIC), even when these are contained within the unit.

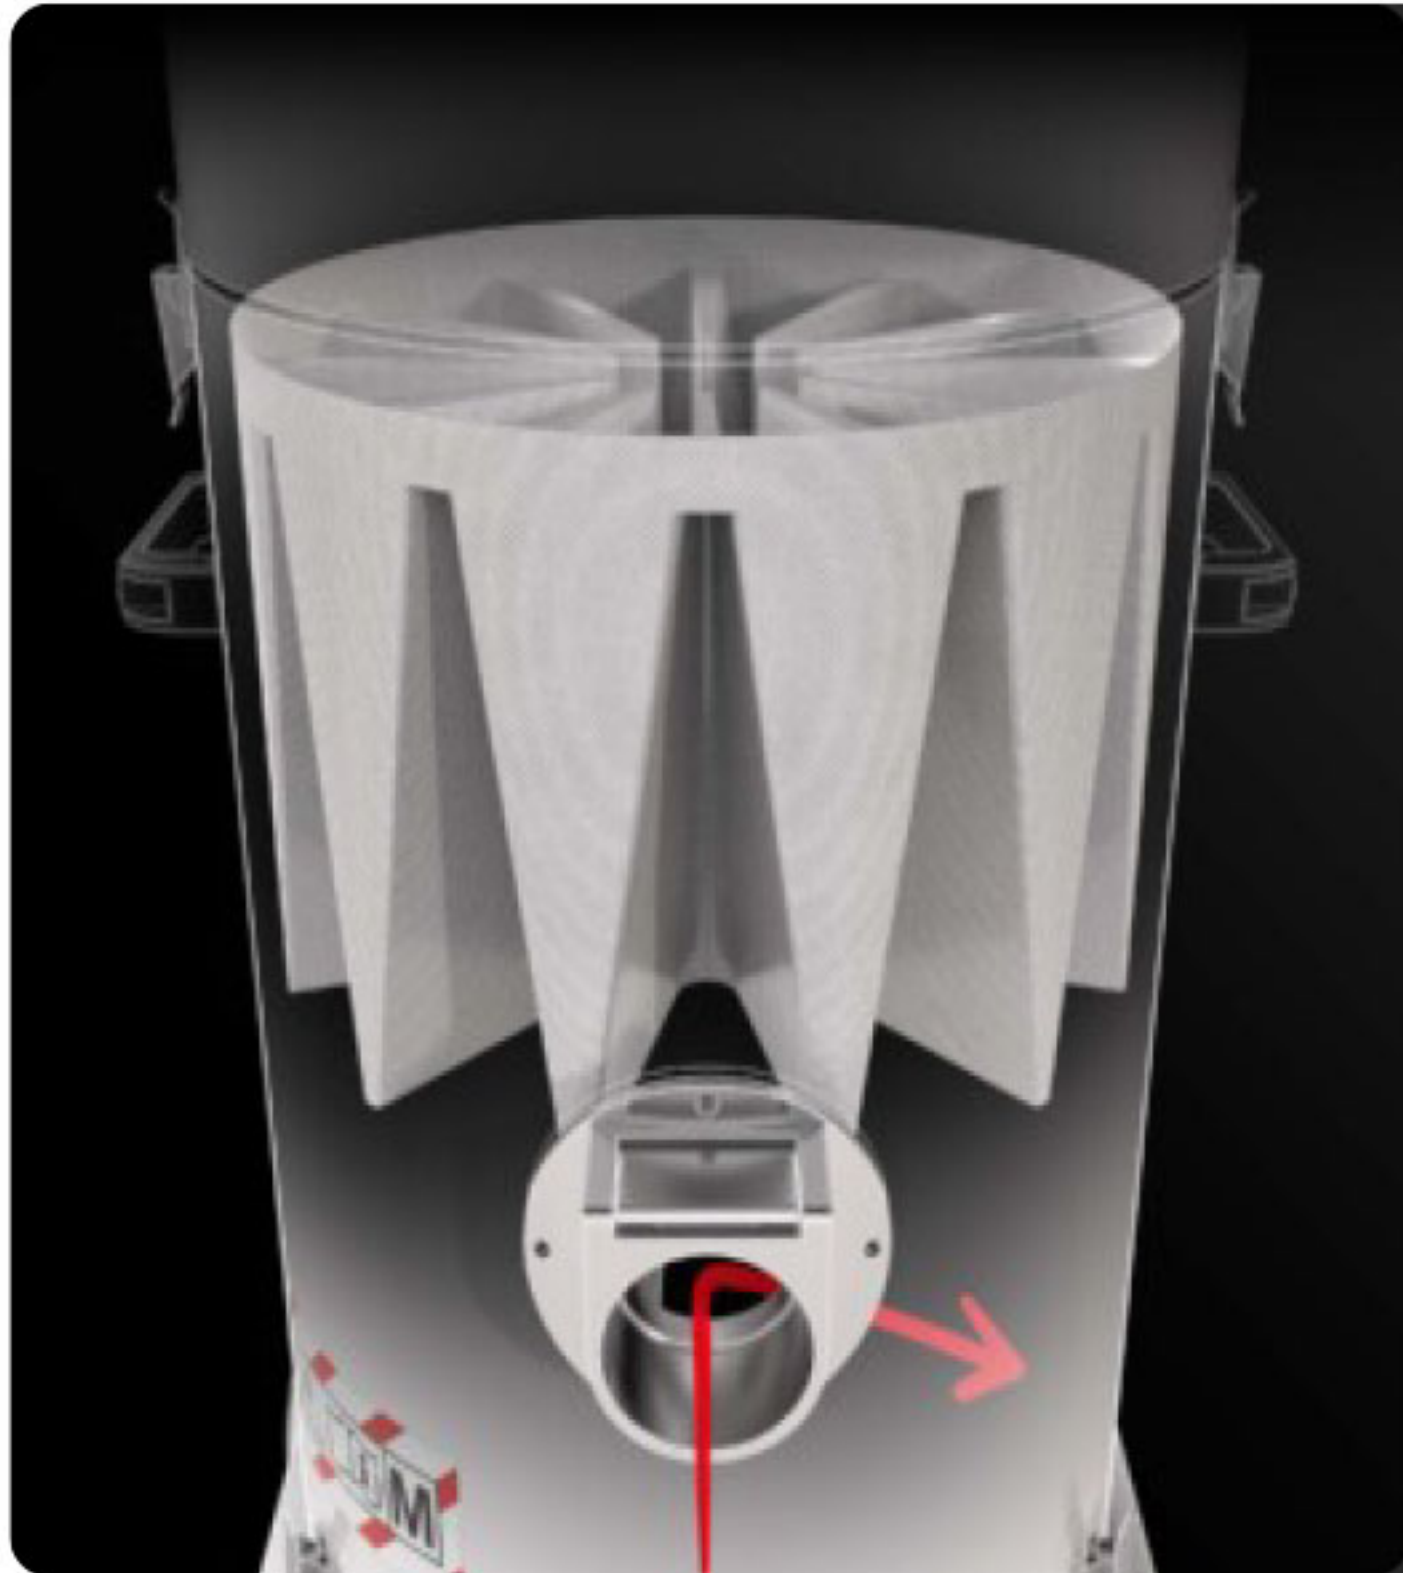

FILTER UNIT

The material is diverted by a deflector protecting the main filter. Filtration is ensured by a class M polyester star filter (filtration efficiency 1 micron) with high filtering surface area, which guarantees air passage even with the dirty filter.



COLLECTION UNIT

The material is collected inside an AISI 304 stainless steel container, complete with a metal handle that allows its release, to avoid any sparks that could be generated by the electrostatic charge.

TECHNICAL DATA

MOTOR		MACHINE		FILTRATION	
Typologies	Atex 2D side channel blower	Atex marking	II 1/2D Ex h IIIC T160 Da/Db	Primary filter type	Star
Power	4 kW - 5,5 HP	EX category	1/2D	Filter surface	24000 cm2
Frequency	50/60 Hz	Operating temperature	-20/+40 C°	EN 60335-2-69 filtration class	M
Voltage	400 V	Suction inlet	70 Ø mm	Media	Antistatic polyester
Vacuum in continuous run	270 mBar	Collection system	AISI304 stainless steel container	Filter Cleaning System	Manual
Maximum air flow	350 m3/h	Capacity	65 Lt		
Insulation class	55 F IP	Dimensions	660 x 800 mm		
Noise level	72 dB(A)	Height	1630 mm		
		Weight	95 Kg		
		Safety valve	Pressure relief valve		


FEATURES



THIRD PARTY ATEX CERTIFICATION



DRY TYPE VACUUM CLEANER
Atex-certified vacuum cleaner with dry dust filtration, as per EN17348

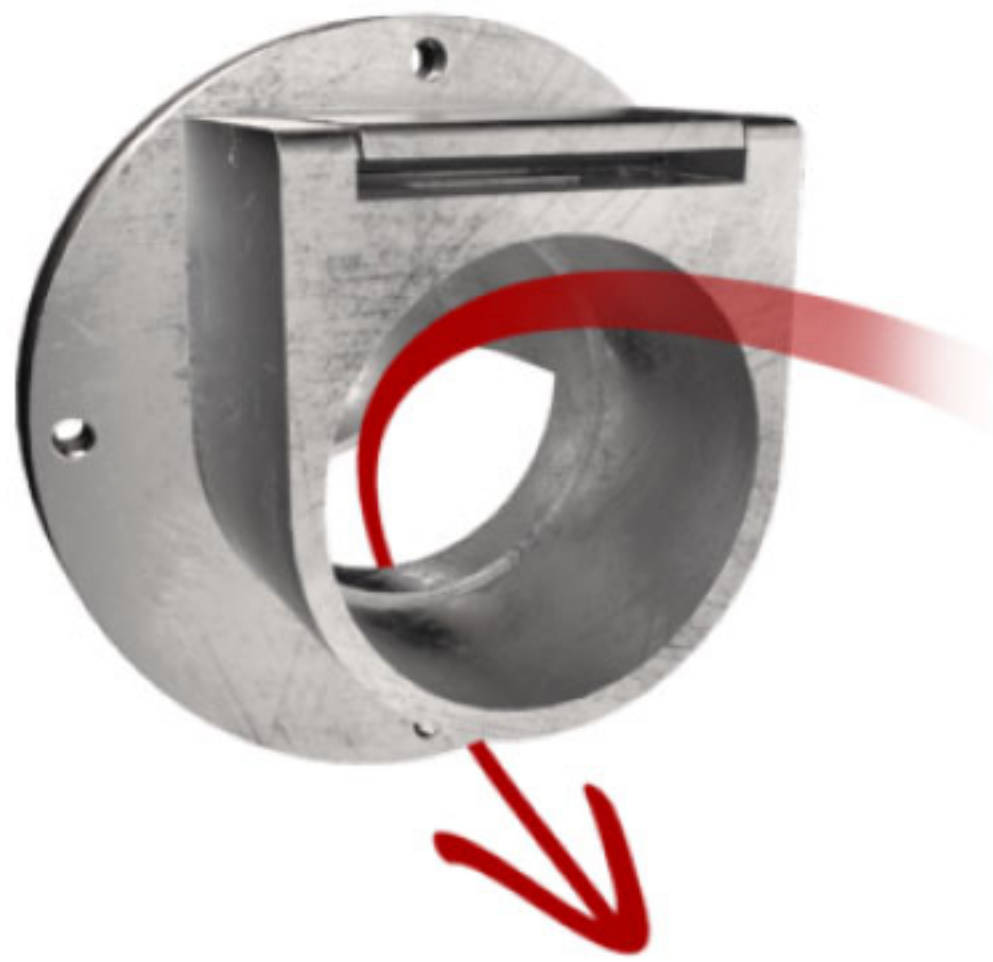

DEFLECTOR
Internal deflector to protect the filter



4-PIN ATEX INDUSTRIAL PLUG



PRV
Pressure relief valve installed



GRD
Grounding



BX
Stainless steel bin AISI 304



ANT M
Antistatic filter (M class EN 60335-2-69)



WHEEL WITH BRAKE
Non-marking wheel with integrated brake



POWER SUPPLY CABLE



VACUUM GAUGE
Vacuum gauge for indication of filter clogged or in need of replacement

OPTIONS

AVAILABLE FILTER MEDIA



HEPA 14
Absolute filter (EN 1822)
22.000 cm² filter surface
H14 Class Filter (EN 1822)
Glass fiber

STRUCTURE AND OPTIONS



60HZ
Available in 60Hz version



3 YEARS WARRANTY
Purchasing the replacement filter along with the vacuum



AB
Accessories basket



GX
Stainless steel bin and chamber AISI 304

ACCESSORIES



P13642
ANTISTATIC KIT PRO Ø 40MM
Complete antistatic system for thorough cleaning of sensitive production environments. - 3 m of electrically conductive EVA tubing - 1x ...



P13641
ANTISTATIC STARTER KIT Ø 40MM
Safety kit for areas with electrostatic hazards, ideal for fine and conductive dust. - 3 m of electrically conductive EVA tubing - 1x 50 ...



P14901/EX
VERTIDEX – ATEX-CERTIFIED ACCESSORY KIT FOR CLEANING AT HEIGHT Ø 40MM
An ultra-lightweight carbon fiber extension system, conductive and ATEX Category 2D certified, designed to reach hard-to-reach areas and ele ...



ÇÖZÜMÜN İLK ADI

Mersinli 2823/1 No: 2/130 Konak / İzmir



Sipariş & Danışma Hattı

0549 449 3535

ONLINE ALIŞVERİŞ

pahaliyaalma.com

KURUMSAL İLETİŞİM

havasis.com.tr

Bursa Bölge
0530 060 1029

Ankara Bölge
0553 251 5537

İstanbul Bölge
0532 440 2191



Teklif & Ürün Bilgi
info@havasis.com.tr

Kalibrasyon Bakım ve Onarım Servisi
servisdestek@kalibo.com.tr